


Magnetic Switch



LK-152N Magnetic Switch


- Contact Rating: 0.1A 100VDC
- Contact Capacity: 10W
- Operating Distance: 30 mm(cc)
- Housing Material: ABS resin(brown, Gray, Ivory)

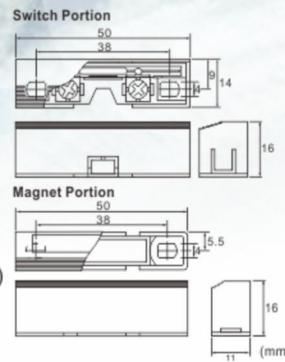

Plastic pad

LK-154 Magnetic Switch

- Contact Rating: 0.1A 100VDC
- Contact Capacity: 10W
- Operating Distance: 30 mm(cc)
- Housing Material: ABS resin
(brown, Gray, Ivory)

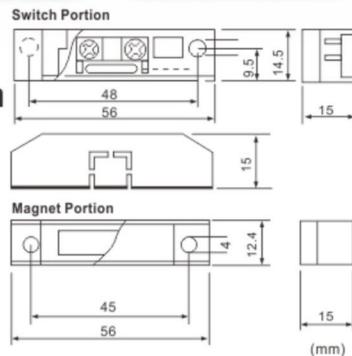

LK-155 Magnetic Switch




Plastic pad

LK-153 Tiny Magnetic Switch




- Contact Rating: 0.1A 100VDC
- Contact Capacity: 5W
- Operating Distance: 15 mm(cc)
- Lead Length: 300mm(22AWG)
- Housing Material: ABS resin (brown, Ivory)

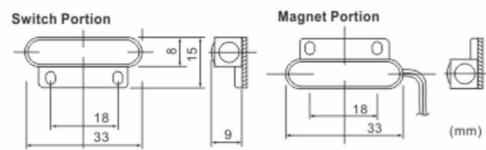


LK-156



- Steel door protection
- Contact Rating: 0.1A 100VDC
- Contact Capacity: 10W
- Operating Distance: 30 mm(cc)
- Lead Length: 300mm(22AWG)



- Contact Rating: 0.2A 30VDC
- Contact Capacity: 5W
- Operating Distance: 30 mm(cc)
- Lead Length: 280mm(22AWG)
- Housing Material: ABS resin
(brown, Gray, Ivory)

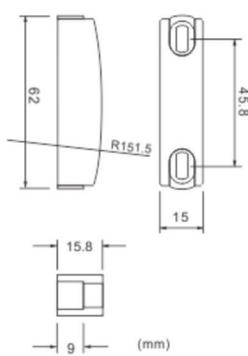


LK-150S for steel door

LK-151 for wood or aluminum door

LK-151S for wood or aluminum door

LK-151-1NC for wood or aluminum door



LK-151-2NC for wood or aluminum door

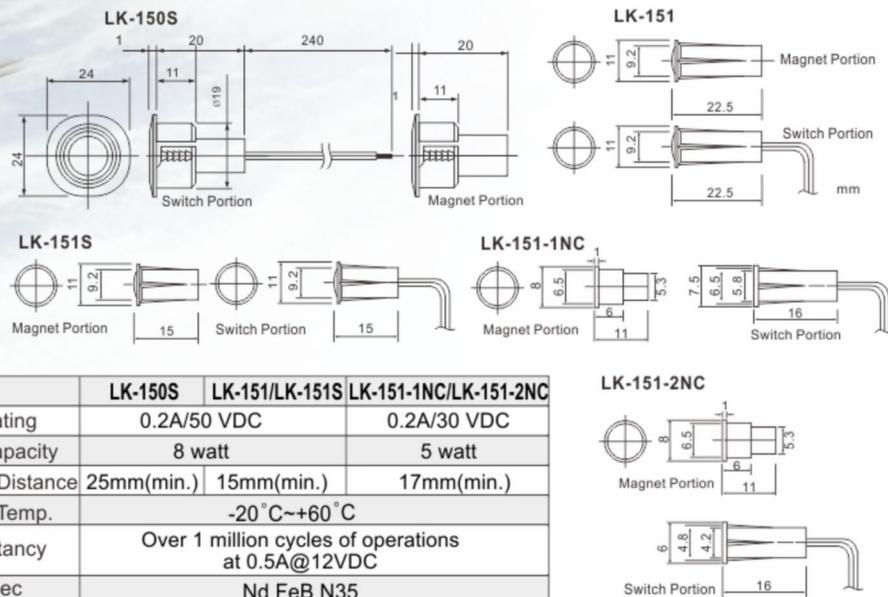

AT-840 shutter Contacts

(Two-way 270° Rotatable Bracket)



- Magnetic contact protection for shutters and large-sized doors
- Contact Rating: 0.2A 30VDC
- Contact Capacity: 5W
- Operating Distance: 90 mm(cc)

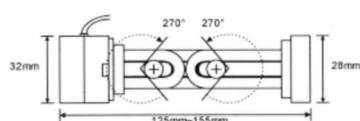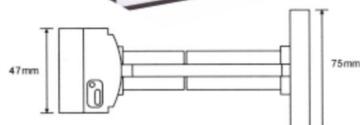

AT-850 shutter Contacts

(Stainless Steel Bracket)

- Magnetic contact protection for shutters and large-sized doors
- Contact Rating: 0.2A 30VDC
- Contact Capacity: 5W
- Operating Distance: 90 mm(cc)
- Lead Length: 270mm(22AWG)



AT-860 Shutter Contacts

- Surface mount, magnetic contact protection for shutters and large sized doors
- Contact Rating: 0.2A 30VDC
- Contact Capacity: 5W
- Operating Distance: 40 mm(max.)

